



TM
®

Helix ****

Page 2

© Japan 2009 - 2010


All design and copyrights reserved

Exclusive European distribution
by Eureka bvba - 2800 Mechelen,
Belgium



Designer: Akio Yamamoto (JP)

- 4 The ring is positioned at the gaps "3" and "4" on the main body.
The surface of the tip of the ring and protrusion 3 on the front of the main body should be positioned flat.
The back of the main body will also be positioned flat with the surface of protrusion 3 in the same way as the front.

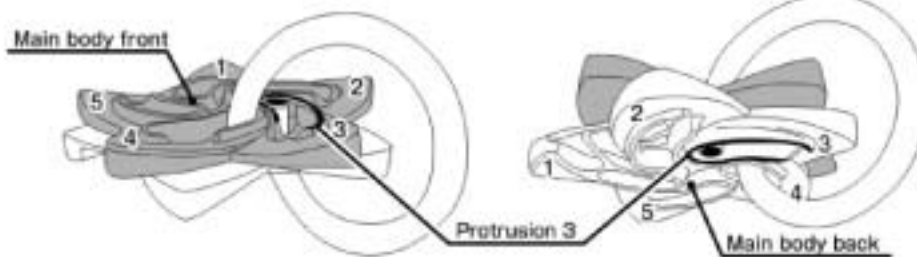

- 5 Rotate the back of the main body clockwise. Simultaneously, move the ring to the back and cause the ring to tilt.




Diagram seen from the side



- 6 Rotate the back of the main body clockwise, while making sure that the front of the main body does not move. At the same time, the ring will start to tilt.

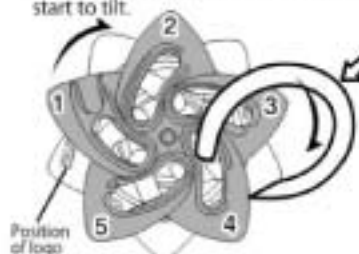


Diagram seen from the side



- 7 Under rotation


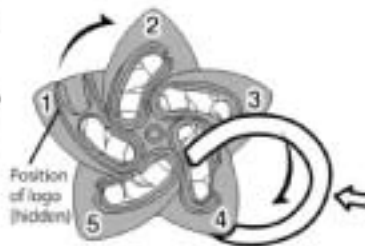


Diagram seen from the side



- 8 Under rotation


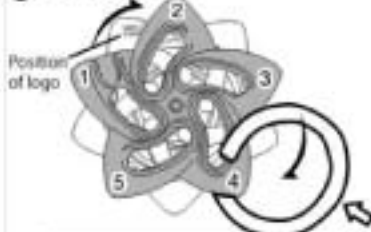


Diagram seen from the side



- 9 Finally, rotate the back of the main body back clockwise, and remove the ring.

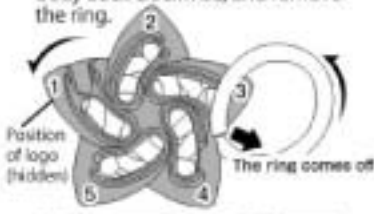


Diagram seen from the back



- 10 Separated.

